

HIGH LUMINOUS EFFICACY

EVEN LIGHTING

ENERGY-SAVING

LIGHT FITTING FOR REFRIGERATING AND FREEZING EQUIPMENT

 **LEDit**



LEDit Tube




LEDit Rail

LEDit Rail




Installed in a special handrail.



Fast 'one-click' installation.

LEDit Tube

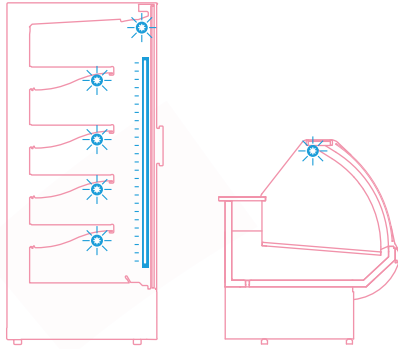

Matt fitting.



A fitting is mounted in rotary holders (patented pending), which ensures the correct positioning of the luminous flux.

Available light colours



cool white
(5700 K)



neutral white
(4000 K)



sun white
(3500 K)



warm white
(3000 K)



red meat
(dark pink)



marbled meat
(light pink)

Main features of the light fitting



Light fitting can be manufactured with any length from **325 mm to 1825 mm**, in 100 mm increments.



Wide range of light colours.



Optional dimmable.



Power supply: **24 V DC**.




Colour rendering index – **CRI \geq 80**.

Typical parameters


of a 1225 mm long LEDit Tube fitting

colour-type	luminous efficacy [lm/W]	luminous flux [lm]	power [W]
	Tube	Tube	
NW-4	112	1715	16,9
WW-4	103	1705	16,9
CW-4	108	1787	16,9
NW-2	94	1030	11,4
WW-2	87	1023	11,4
CW-2	91	1072	11,4

typ 2 – under-shelf lighting, **typ 4** – main upper lighting



LEDit Tube



LEDit Rail

MEET THE LEDit FAMILY



Light fitting for refrigerating and freezing equipment.

JBG-2 Sp. z o.o.

ul. Gajowa 5
43-254 Warszowice, Poland

E: info@jbg2.com
T: +48 32 494 00 00

www.jbg2.com